

# Jacuzzi J-335


## Specifications

Seating Capacity.....	5-6 Adults
Dimensions .....	84" x 84" x 36" (213.5 cm x 213.5 cm x 91.44 cm); <b>For Complete Dimensions, See page 84</b>
Perimeter .....	336 in. (853.4 cm)
Dry Weight.....	764 lbs (347 kg)
Filled Weight (Spa Volume) .....	4,684 lbs (2,125 kg)
Filled Weight (Average Fill).....	3,683 lbs (1,671 kg)
Water Capacity (Spa Volume) .....	450 US gallons (1,703 Liters)
Water Capacity (Average Fill) .....	350 US gallons (1,325 Liters)
Electronic Controls .....	Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles
Pump 1.....	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
Export (50 Hz):.....	<b>1-Speed, 2.0 HP continuous</b>
Pump 2.....	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
Export (50 Hz):.....	<b>1-Speed, 2.0 HP continuous</b>
Circulation Pump.....	Yes, 8-hour
Heater .....	North America (60 Hz): 5.5 kW High Flow
Export (50 Hz) .....	<b>2.7 kW High Flow</b>
Total PowerPro® Jets.....	42
Seat A Jets .....	2 PowerPro® FX Large Rotational
Seat B Jets .....	4 PowerPro® FX, 1 PowerPro® FX Large Rotational, 12 PowerPro® BX
Seat C Jets .....	1 PowerPro® FX Large Rotational
Seat D Jets .....	10 PowerPro® FX, 2 PowerPro® FX Rotational
Seat D HYDROSOOTHE™ Jets .....	2 PowerPro® FX Directional with independent flow rate valve
Seat E Jets .....	2 PowerPro® FX, 2 PowerPro® FX Rotational, 2 PowerPro® FX Large
Footwell (F) .....	2 PowerPro® MX
Massage Selectors .....	2
Air Controls .....	3, On/Off rocker style
Water Management System .....	Two 60 ft² filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed CLEARARRAY Active Oxygen™ Clean Water System
Export (50 Hz):.....	<b>Factory installed CLEARARRAY Active Oxygen™ Clean Water System</b>
LED Lighting .....	One underwater light with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and OPTIONAL exterior light
ProFinish™ Cabinet Colors .....	Modern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic Colors .....	Platinum, Silver Pearl, Monaco, Midnight, Porcelain
Headrests .....	4
Waterfall .....	One independent flow rate (on or off) adjustment; powered by the circulation pump
Electrical Requirements: .....	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
Warranty* .....	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
Special Features (Optional) .....	SmartTub™ Module, Exterior Lights
Audio System (Optional).....	BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer



# Jacuzzi J-335

## Operation/Seat Depths

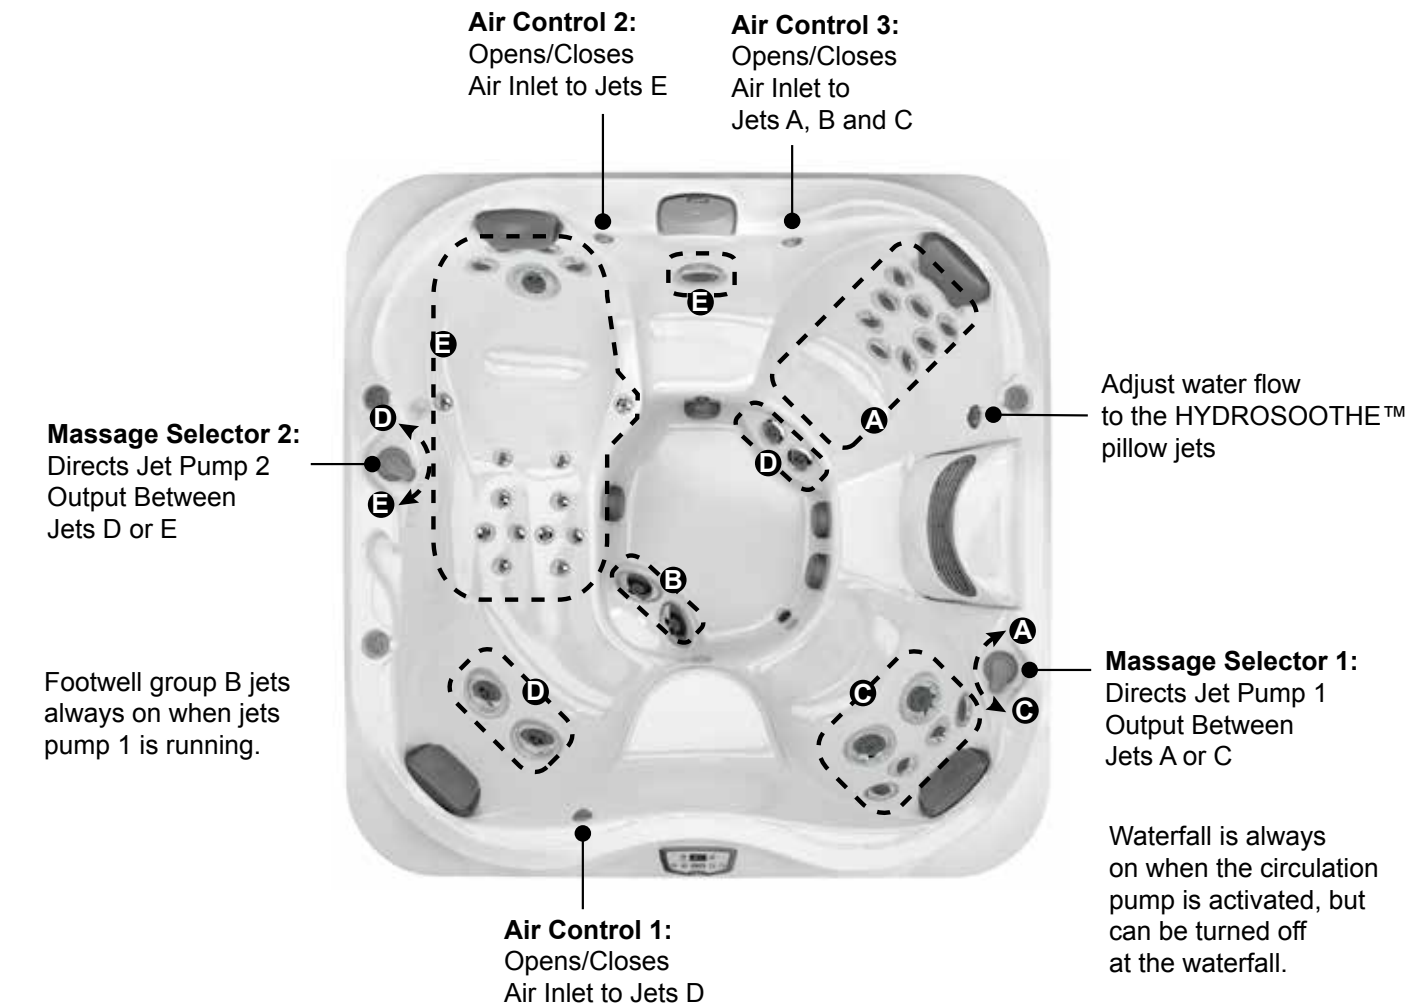

### 42 Total Jets



Spa Operation Subject to Change without Notice

## Seat Depths

**A = 25.75" (65.4 cm)**

**B = 27.50" (69.9 cm)**

**C = 23.50" (59.7 cm)**

**D = 28.25" (71.8 cm)**


**E = 22.75" (57.8 cm)**

**F = 25.50" (64.8 cm)**

**G = 16.75" (42.5 cm)**

**H = 33.50" (85.1 cm)**


Listed dimensions  
represent distance from  
top of acrylic to lowest  
point in seat. Tolerance  $\pm$   
0.5" (1.27 cm).

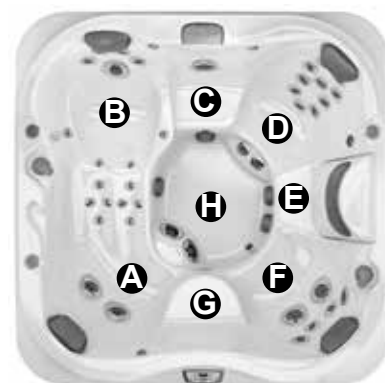


Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-335

## Dimensions

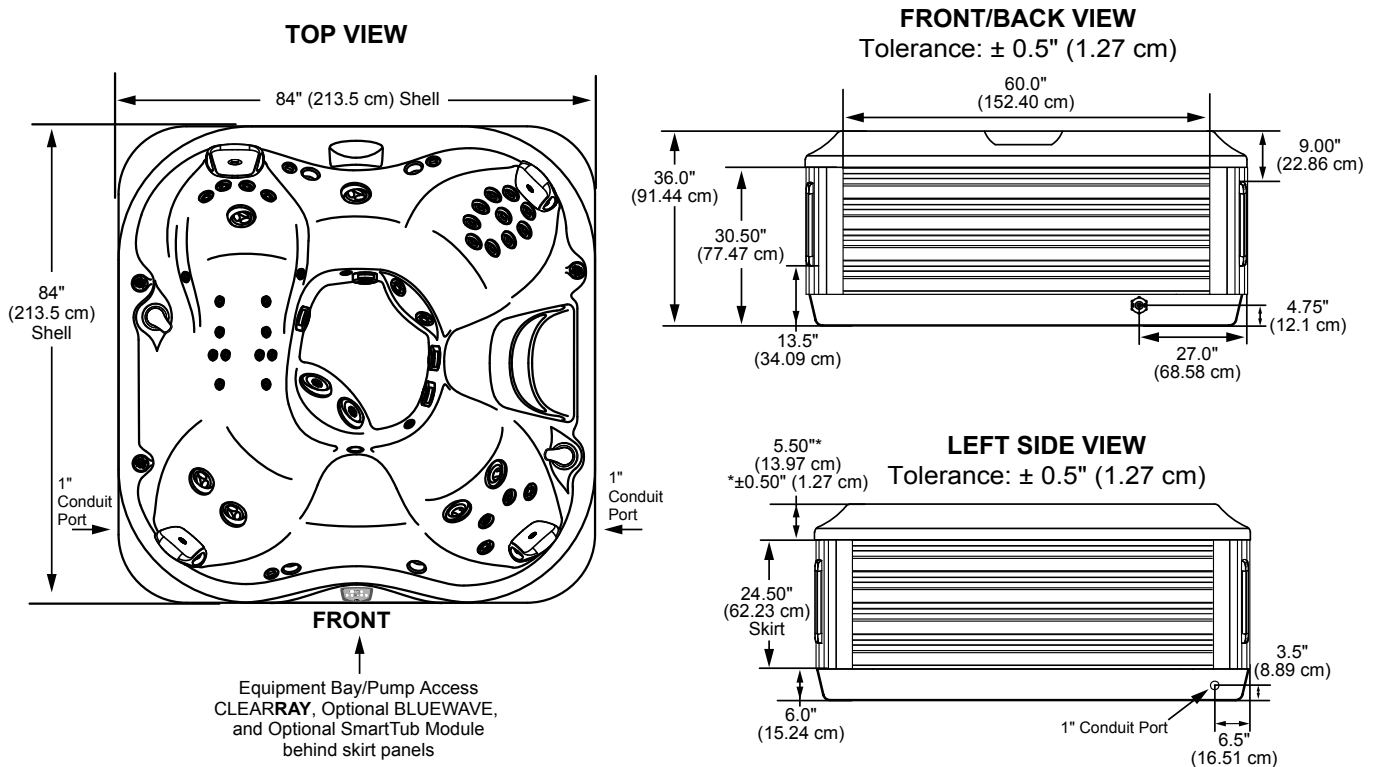


**IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

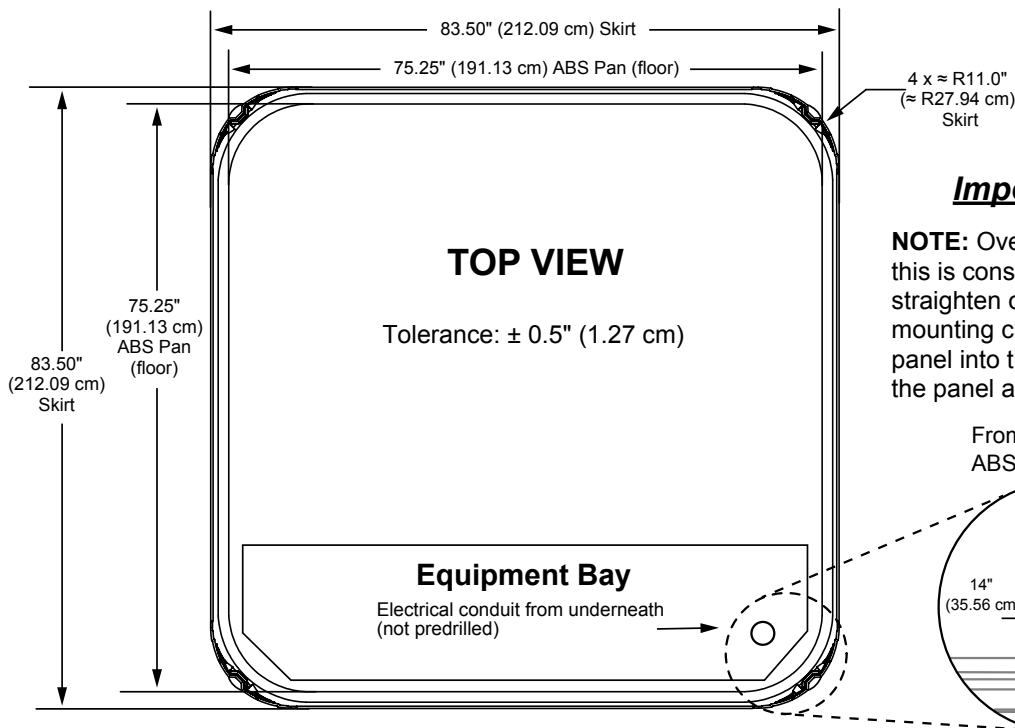

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

From the edge of the ABS pan



Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)