# Jacuzzi J-345

## Specifications

**Seating Capacity**.....6-7 Adults
**Dimensions** .....84" x 84" x 36" (213.5 cm x 213.5 cm x 91.44 cm);
**For Complete Dimensions, See page 84**
**Perimeter**.....336 in. (853.4 cm)
**Dry Weight**.....777 lbs (352 kg)
**Filled Weight (Spa Volume)** .....4,488 lbs (2,036 kg)
**Filled Weight (Average Fill)**.....3,654 lbs (1,306 kg)
**Water Capacity (Spa Volume)**.....445 US gallons (1,685 Liters)
**Water Capacity (Average Fill)**.....345 US gallons (1,306 Liters)
**Electronic Controls** .....Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles
**Pump 1** .....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
**Export (50 Hz):.....1-Speed, 2.0 HP continuous**
**Pump 2**.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
**Export (50 Hz):.....1-Speed, 2.0 HP continuous**
**Circulation Pump**.....Yes, 8-hour
**Heater** .....North America (60 Hz): 5.5kW High Flow
**Export (50 Hz).....2.7kW High Flow**
**Total PowerPro® Jets**.....41
**Seat A Jets** .....4 PowerPro® FX, 2 PowerPro® FX Large Rotational, 2 PowerPro® FX Small
**Seat B Jets** .....2 PowerPro® FX
**Seat C Jets** .....3 PowerPro® MX, 2 PowerPro® FX Rotational, 2 PowerPro® FX Small
**Seat D Jets** .....1 PowerPro® FX Large Rotational
**Seat E Jets** .....10 PowerPro® FX, 2 PowerPro® FX Small
**Seat E HYDROSOOTHE™ Jets**.....2 PowerPro® FX Directional with independent flow rate valve
**Seat F Jets**.....2 PowerPro® FX Large, 2 PowerPro® FX Rotational, 2 PowerPro® FX, 2 PowerPro® FX Small
**Footwell (G)**.....8 PowerPro® FX Small, 1 PowerPro® FX
**Massage Selectors** .....2
**Air Controls**.....4, On/Off rocker style
**Water Management System**.....Two 60 $ft^2$ filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed CLEARRAY Active Oxygen™ Clean Water System
**Export (50 Hz):.....Factory installed CLEARRAY Active Oxygen™ Clean Water System**
**LED Lighting** .....One underwater light with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and OPTIONAL exterior light
**ProFinish™ Cabinet Colors**.....Modern Hardwood, Brushed Gray, and Smoked Ebony
**Acrylic Colors** .....Platinum, Silver Pearl, Monaco, Midnight, Porcelain
**Headrests** .....4
**Waterfall** .....One independent flow rate (on or off) adjustment; powered by the circulation pump
**Electrical Requirements**:.....North America (60 Hz): 240 VAC@40A, 50A, or 60A
**Export (50 Hz): 230-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.**
**Warranty***.....**North America (60 Hz):** 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo;
**Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo**
**Special Features (Optional)**.....SmartTub™ Module, Exterior Lights
**Audio System (Optional)**.....BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer

*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-345

## Operation/Seat Depths

**41 Total Jets**

HYDROSOOTHE Jets (2)

Power-Pro® FX Jets (19)

Power-Pro® FX Small Jets (8)

Power-Pro® FX Rotational Jets (4)

Power-Pro® FX Large Jets (2)

Power-Pro® FX Large Rotational Jets (3)

Power-Pro® MX Jets (3)

Spa Operation Subject to Change without Notice

## Seat Depths

**A = 25.25" (64.1 cm)**

**B = 25.25" (64.1 cm)**

**C = 25.13" (63.8 cm)**

**D = 23.50" (59.7 cm)**

**E = 28.50" (72.4 cm)**

**F = 25.13" (63.8 cm)**

**G = 16.75" (42.5 cm)**

**H = 33.50" (85.1 cm)**

**Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance ± 0.5" (1.27 cm).**

Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-345

## Dimensions

**TOP VIEW**




**FRONT**

Equipment Bay/Pump Access
CLEAR**RAY**, Optional BLUEWAVE,
and Optional SmartTub Module
behind skirt panels

**FRONT/BACK VIEW**

Tolerance: ± 0.5" (1.27 cm)

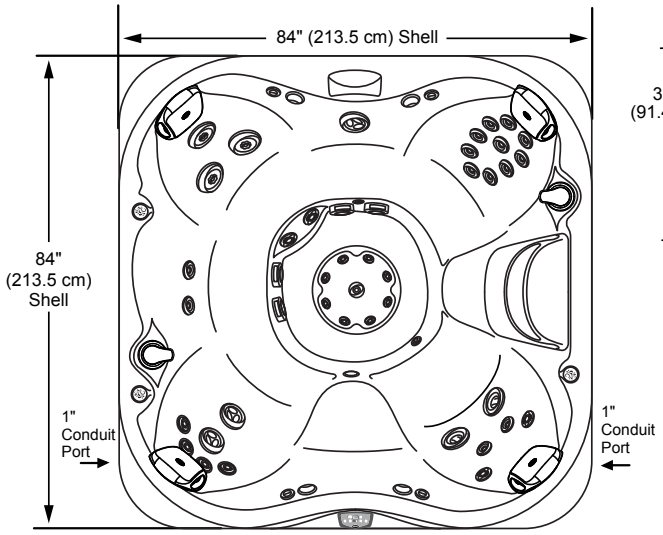


**LEFT SIDE VIEW**

Tolerance: ± 0.5" (1.27 cm)




**STOP** **IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.** **STOP**

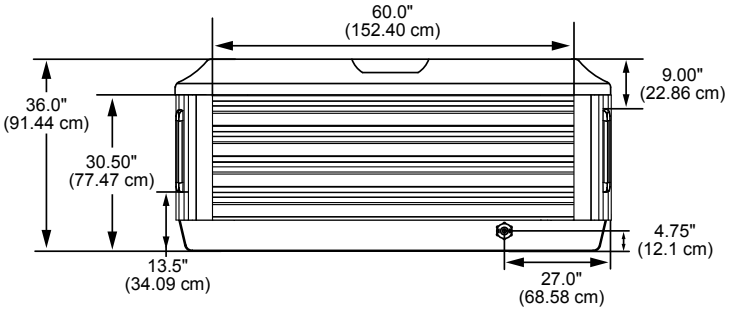


**TOP VIEW**

Tolerance: ± 0.5" (1.27 cm)

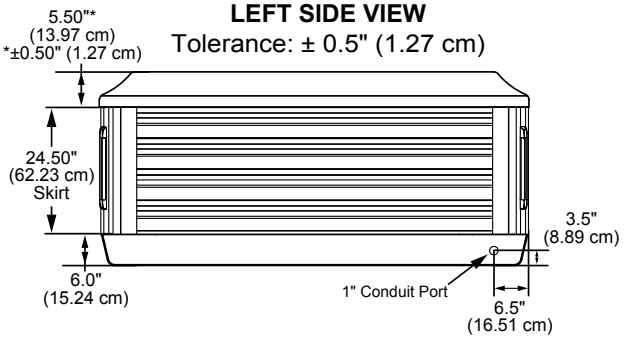From the edge of the ABS pan

### ***Important Panel Details***

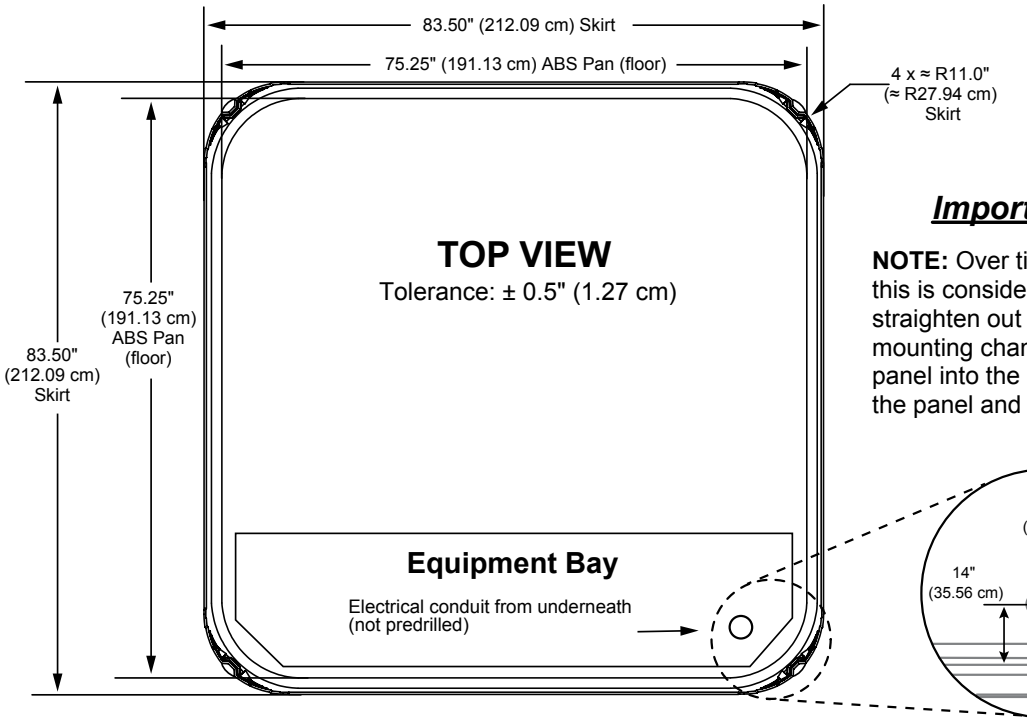**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)