


# Jacuzzi J-475


## Specifications

Seating Capacity .....	6-7 Adults
Dimensions .....	91" x 91" x 37.5" Front/43.5" Back, (231.14 cm x 231.14 cm x 95.25 cm Front/110.49 cm Back); <b>For Complete Dimensions, See page 83</b>
Perimeter .....	364 in. (924.6 cm)
Dry Weight .....	925 lbs (419.5 kg)
Filled Weight (Average Fill) .....	4,595 lbs (2,084 kg)
Water Capacity (Average Fill) .....	440 US gallons (1,666 Liters)
Filled Weight (Spa Volume) .....	5,387 lbs (2,444 kg)
Water Capacity (Spa Volume) .....	535 US gallons (2,025 Liters)
Electronic Controls .....	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
Pump 1 .....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
Export (50 Hz): .....	<b>1-Speed, 2.0 HP continuous</b>
Pump 2 .....	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
Export (50 Hz): .....	<b>1-Speed, 2.0 HP continuous</b>
Circulation Pump .....	Yes, 8-Hour
Total PowerPro® Jets .....	55
Seat A Jets .....	2 PowerPro® NX2, 3 PowerPro® MX, 2 PowerPro® FX Rotational
Seat B Jets .....	2 PowerPro® NX2, 6 PowerPro® FX Rotational, 6 PowerPro® FX
Seat C Jets .....	2 PowerPro® FX Large
Seat D Jets .....	2 PowerPro® NX2, 6 PowerPro® RX, 8 PowerPro® PX, 2 PowerPro® FX Large
Seat E Jet .....	4 PowerPro® FX, 1 PowerPro® FX Large Rotational
Footwell (F) .....	8 PowerPro® FX Small, 1 PowerPro® FX Large
Massage Selectors .....	2
Air Controls .....	4, On/Off rocker switch air controller
Water Management System .....	One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; Factory installed CLEARARRAY Active Oxygen™ Clean Water System
Export (50 Hz): .....	<b>Factory installed CLEARARRAY Active Oxygen™ Clean Water System</b>
LED Lighting .....	Waterfall light, massage selectors, cupholders, underwater, indicator light, and exterior lights
ProFinish™ Cabinet Colors .....	Modern Hardwood, Brushed Gray, and Smoked Ebony
Acrylic Colors .....	Platinum, Silver Pearl, Monaco, Midnight, Porcelain
Headrests .....	4
Waterfall .....	One with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
Electrical Requirements: .....	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@ 1x32A, 1x20A/1x16A, 1x16A/1x16A/1x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
Warranty* .....	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
Special Features (Optional) .....	SmartTub™ Module
Audio System (Optional) .....	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm head-phone jack port; 4 premium speakers, a powered subwoofer

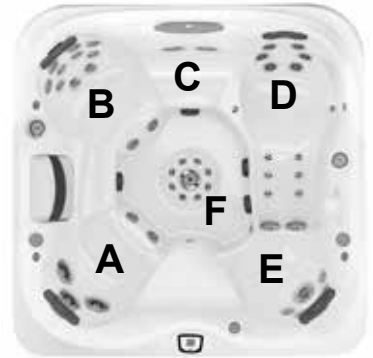

# Jacuzzi J-475

## Operation/Seat Depths

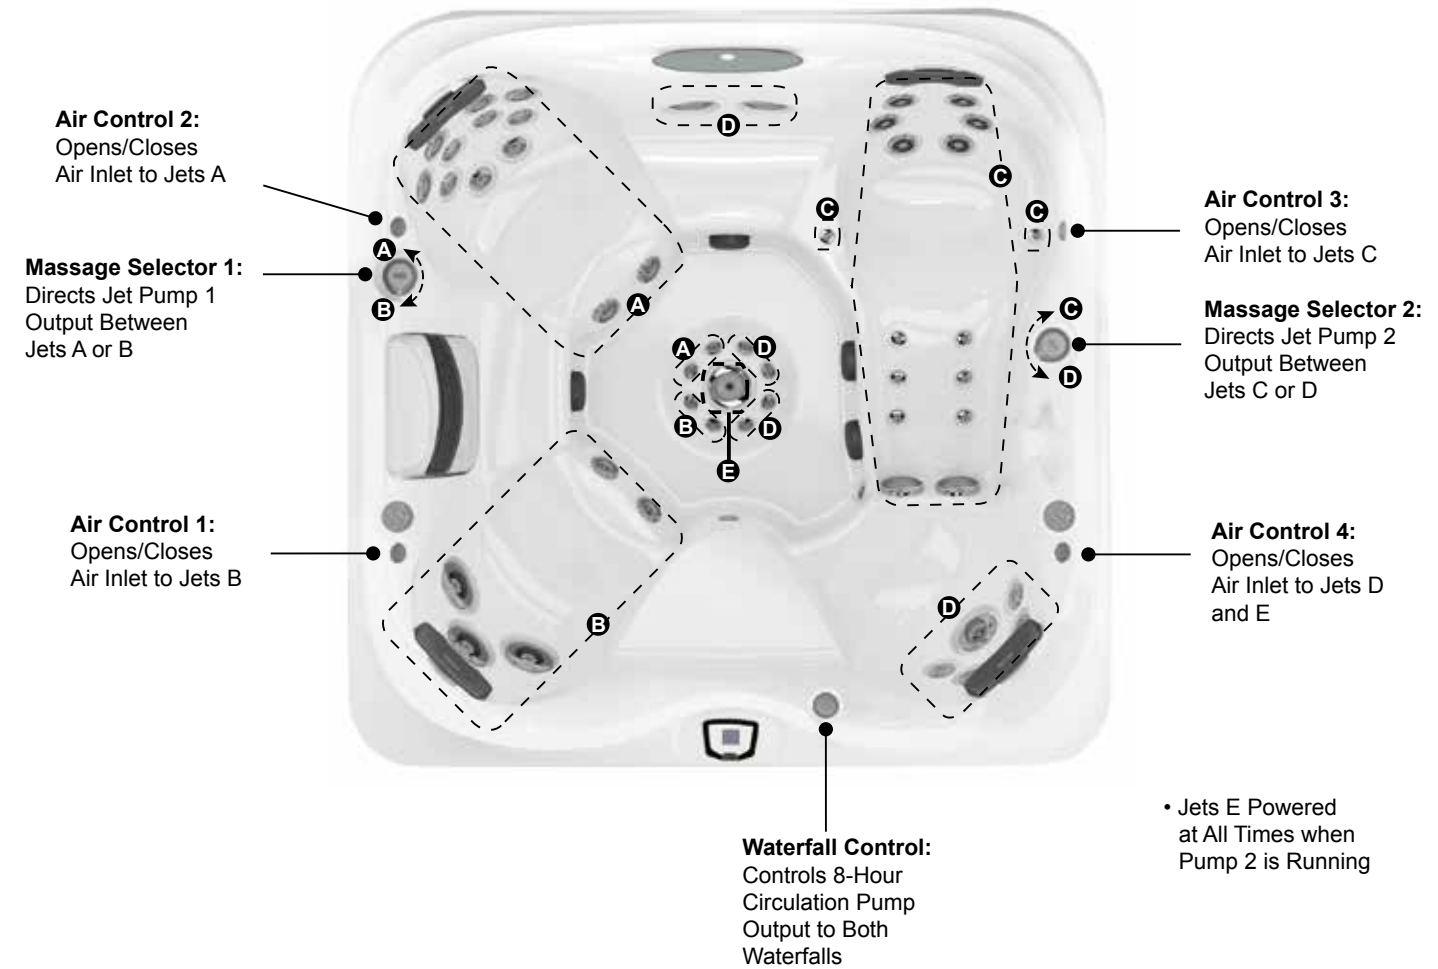

### 55 Total Jets




Spa Operation Subject to Change without Notice

## Seat Depths

**A = 25.25" (64.14 cm)**  
**B = 23.00" (58.42 cm)**  
**C = 29.50" (74.93 cm)**  
**D = 23.25" (59.06 cm)**  
**E = 29.25" (74.30 cm)**  
**F = 25.25" (64.14 cm)**

**G = 17.25" (43.82 cm)**  
**H = 32.50" (82.55 cm)**  
**I = 19.75" (50.17 cm)**  
**J = 28.50" (72.39 cm)**




Listed dimensions  
represent distance  
from top of acrylic to  
lowest point in seat.  
**Tolerance ± 0.5"**  
(1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-475

## Dimensions

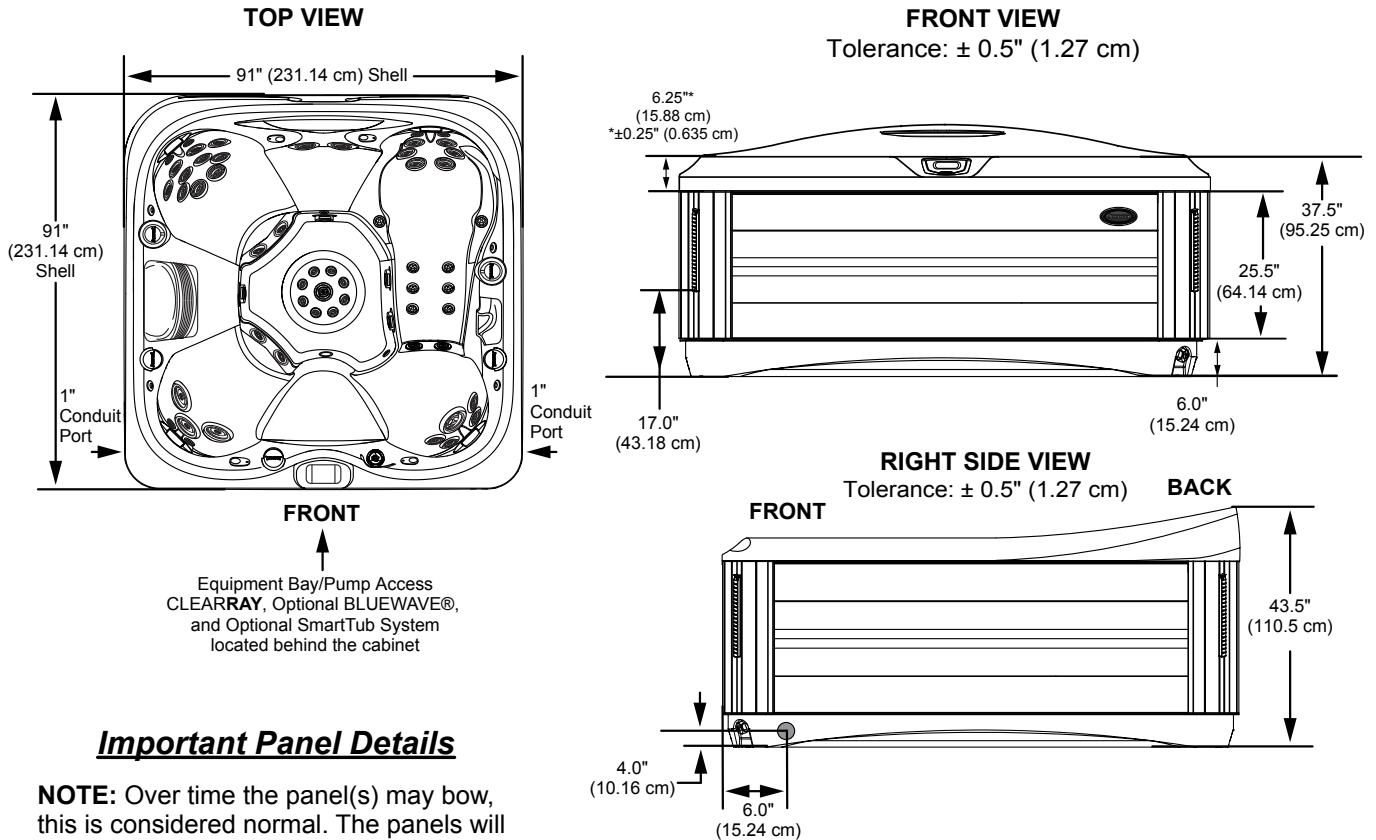


### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

**STOP**

**IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

**STOP**

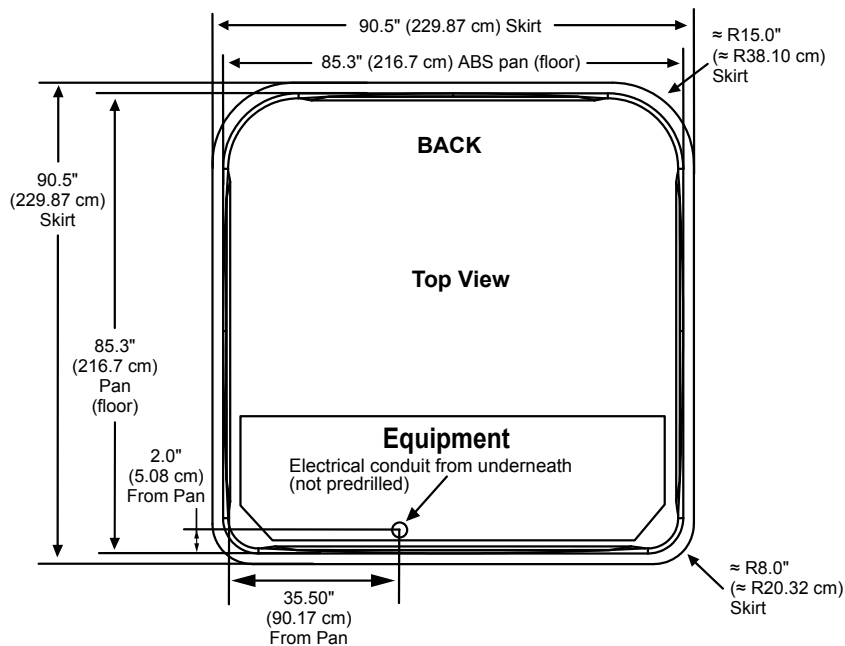

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)